

Project: _____
 Type: _____
 Model# _____

DL 6 RSE

6" Round Smooth Down Light

DESCRIPTION

6" LED Round Down Light, DL 6 RSE is compatible with most 6" standard recessed new construction and remodel housings. The Retrofit Kit comes with an E26 medium screw-base Edison adapter for easy installation into standard incandescent sockets.

PRODUCT SPECIFICATIONS

- White painted stamped aluminum body.
- Oversized trim ring.
- Torsion spring mounting style are designed to accommodate most 5" and 6" standard and shallow housings.
- E26 medium screw-base Edison adapter provides easy installation into Incandescent housings.
(GU10 and GU24 socket adapter available - sold separately)

LED LIGHT ENGINE

- Protected LED driver performs at 120V.
- Dimming down to 10% with most TRIAC dimmers (at 120V only).
- CCT 2700K, 3000K, 4000K, 5000K available
- CRI 90
- Long life LED chips guaranteed up to 50,000 hours.

LISTINGS


- cULus classified
- Energy star qualified
- Wet locations (Not suitable for coastal/salt water area)
- RoHS compliances
- Tested in accordance with IESNA LM79 & LM80

PERFORMANCE DATA


	3000K
Input Voltage	120V
Input Power	13W
Frequency	50 / 60Hz
Operation temp	-22°F ~ 104°F
Lumens	800
CRI	90



DIMENSIONS

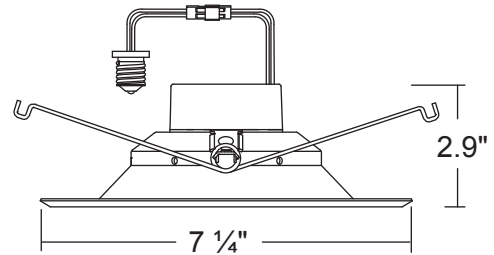

PHOTOMETRIC

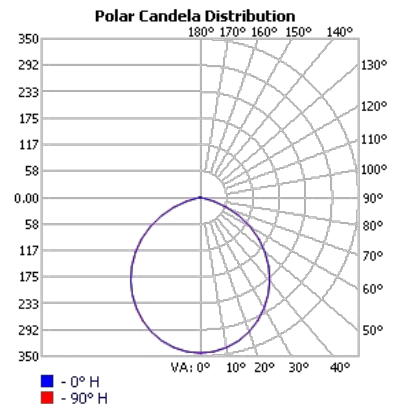

Standard Models	Style	Watts	Lumens	Kelvin	Volt	Finish
DL 6 RSE 23 13 27K Z W	Round Smooth	13	750	2700K**	120	White
DL 6 RSE 23 13 30K Z W	Round Smooth	13	800	3000K	120	White
DL 6 RSE 23 13 40K Z W	Round Smooth	13	870	4000K	120	White
DL 6 RSE 23 13 50K Z W	Round Smooth	13	910	5000K	120	White

** Special Order

